


# BaseLine®

## BaseLine®

BaseLine® is a standard gypsum board with ivory face paper universally used for wall partitions, wall linings and ceiling systems. It is non-combustible and has superior thermal insulation.

Gyproc® BaseLine® is smooth and level, giving a beautiful appearance ideal for interior walls and ceilings.

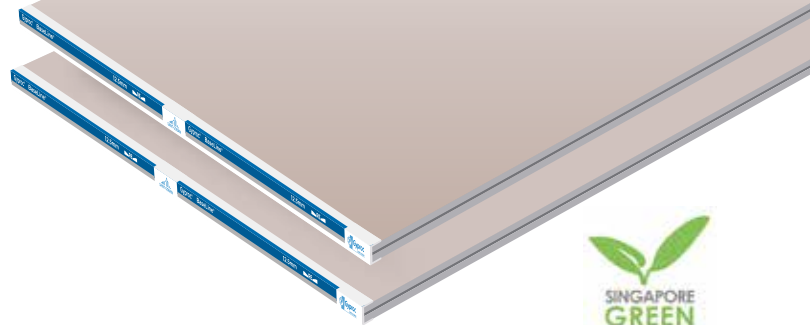

SGBP 2018-1224



## CHARACTERISTICS

A standard gypsum board, consisting of an aerated gypsum core encased in, and firmly bonded to stronger paper liners.

## RECOMMENDED USE

Suitable for most applications where normal fire, structural and acoustic levels are specified and suitable for all direct decoration.

## PRODUCT FORMAT

Thickness	12.5mm	15mm
Nominal Weight	7.60kg/m <sup>2</sup>	10.00kg/m <sup>2</sup>
Nominal Sheet Size	1220mm x 2440mm	
Edge Type	Recessed Edge	Square Edge
		

## FIRE RATING

- Non-combustible material in accordance to BS 476: Part 4
- Low fire propagation in accordance to BS 476: Part 6
- Class 1 surface spread of flame in accordance to BS 476: Part 7
- Provide fire resistance in accordance to BS 476: Part 22 (BaseLine® in GypWall® system)

## MANUFACTURING SPECIFICATIONS

- In compliance with ASTM C1396M and BS EN 520

## AESTHETIC PROPERTIES

- Crack-free
- Easily decorated with paint, cornices, tiles, wallpaper, etc.
- Seamless and smooth finishing

## HANDLING AND WORKABILITY


- Lightweight
- Quick and easy installation
- Highly flexible in creating the highest standards of design

## HEALTH AND ENVIRONMENTAL CONTRIBUTIONS

- Made from 100% natural gypsum
- Recyclable material, hence environmentally friendly and certified with Green Product Certification Scheme
- Does not produce toxic fumes or hazardous substances that are harmful to health
- Product is manufactured in a facility certified to standards of ISO 14001 and ISO 9002.

## Gyproc® CLASSIC Concealed Ceiling System

A concealed suspended ceiling system that gives a beautiful, homogeneous appearance, smooth finish without visible joints.

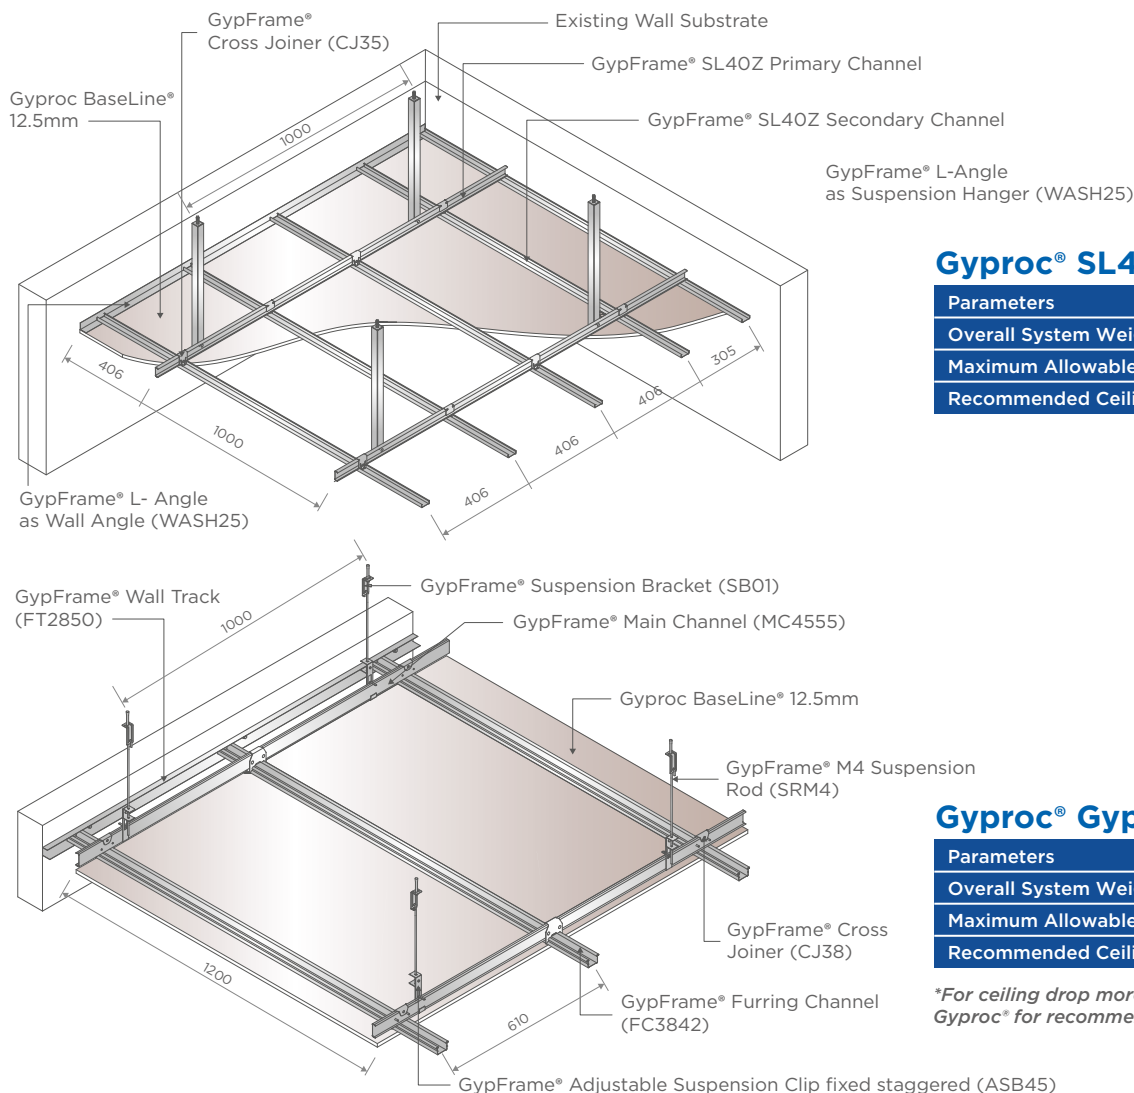

### Gyproc® SL40Z

Parameters	Values
Overall System Weight	10.20kg/m <sup>2</sup>
Maximum Allowable Loads	3.00kg/m <sup>2</sup>
Recommended Ceiling Drop	≤ 1.50m


### Gyproc® GypLock™ Standard

Parameters	Values
Overall System Weight	10.20kg/m <sup>2</sup>
Maximum Allowable Loads	3.00kg/m <sup>2</sup>
Recommended Ceiling Drop	> 1.50m up to 3.00m

*\*For ceiling drop more than 3.00m please contact Gyproc® for recommendation*

## Gyproc® CLASSIC Wall System


A seamless partition system meeting basic functional requirements.

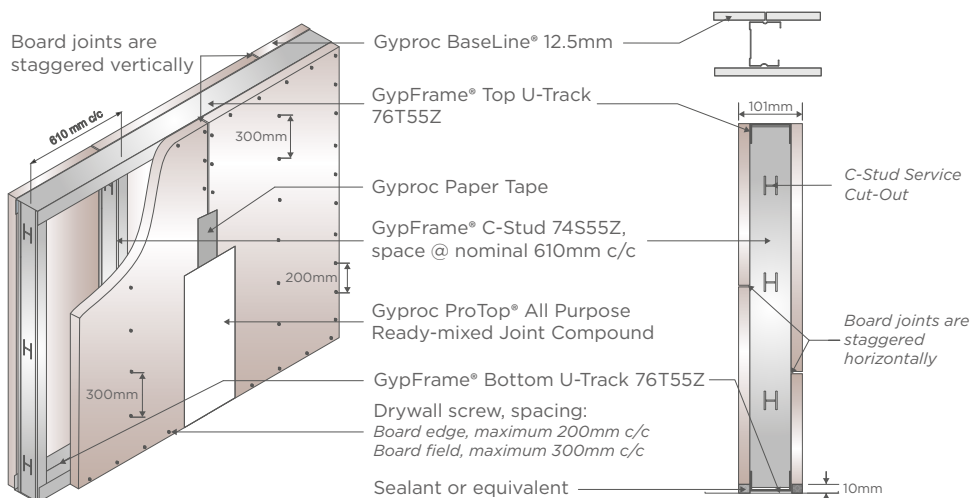

### GypWall® CLASSIC 74S55Z

Parameters	Values
Overall System Weight	17.70kg/m <sup>2</sup>
Maximum Height (L/240 @ 0.25kPa)	4.13m

*\*Wall height more than 3.80m please consult Gyproc® for recommendation*



**Saint-Gobain Malaysia Sdn. Bhd.** (636775-T)  
No.1, Jalan Sultan Mohamad 4  
Kawasan Perindustrian Bandar  
Sultan Suleiman, Port Klang,  
42000 Selangor, Malaysia.  
Tel: +603 3169 5588  
Fax: +603 3169 5688  
Email: solutions.my@saint-gobain.com  
[www.gyproc.my](http://www.gyproc.my)

SINGAPORE OFFICE  
**Saint-Gobain (Singapore) Pte.Ltd.**  
2 Venture Drive, #09-10/11/12/13/14  
Vision Exchange  
Singapore 608526  
Tel: +65 6330 8288  
[www.gyproc.sg](http://www.gyproc.sg)