

Gyprex™

Gyprex™

PVC LAMINATED CEILING TILES


Gyprex™ is a high performance and easy maintenance vinyl faced gypsum tile that offers outstanding value. Its wipe-clean, hard-wearing surface makes it ideal for food preparation and hygienic facilities as well as wet areas. Available in white finish as standard.



RECOMMENDED USE

Gyprex™ ceiling tiles are ideally used in hygiene sensitive areas such as hospitals, kitchens, clean rooms as well as high humidity areas.

PRODUCT FORMAT

Thickness	9mm
Nominal Weight	5.25kg/m ²
Nominal Sheet Size	603mm x 1213mm, 603mm x 603mm, 595 mm x 1195mm, 595mm x 595mm
Edge Type	Trim (Square) 

FIRE RATING

- Low flame spread index of not over 25 (tested to ASTM E 84) OR Class 1 (tested to BS 476 PART 7). Does not produce toxic fumes or hazardous substance that are harmful to health.
- Non-combustible material when tested in accordance to BS 476 Part 4
- Class 0 material when tested in accordance to BS 476 Part 6 & 7

MANUFACTURING SPECIFICATIONS

- In compliance with ASTM C 1396M, BS EN 520

AESTHETIC PROPERTIES

- Long wearing surface
- Washable surface
- Ideal for clean room- Class 1 Clean Room Classification ISO 14644-1

HANDLING AND WORKABILITY


- Lightweight
- Quick and easy installation
- Durable and long lasting

HEALTH AND ENVIRONMENTAL CONTRIBUTIONS

- Made from 100% natural gypsum
- Recyclable material, hence environmentally friendly and certified with Green Product Certification Scheme
- Does not produce toxic fumes or hazardous substances that are harmful to health
- Product is manufactured in a facility certified to standards of ISO 14001 and ISO 9002.


Gyproc® Grid Ceiling System

Gyproc® Grid Ceiling System is a lay-in grid system based on lightweight gypsum board and metal frame. It use gypsum ceiling tiles for the perfect finish and combines the durability, unique aesthetics look with various ceiling tiles design. The system is perfect to use for regular ceiling type and suitable for all ready cut-boards.

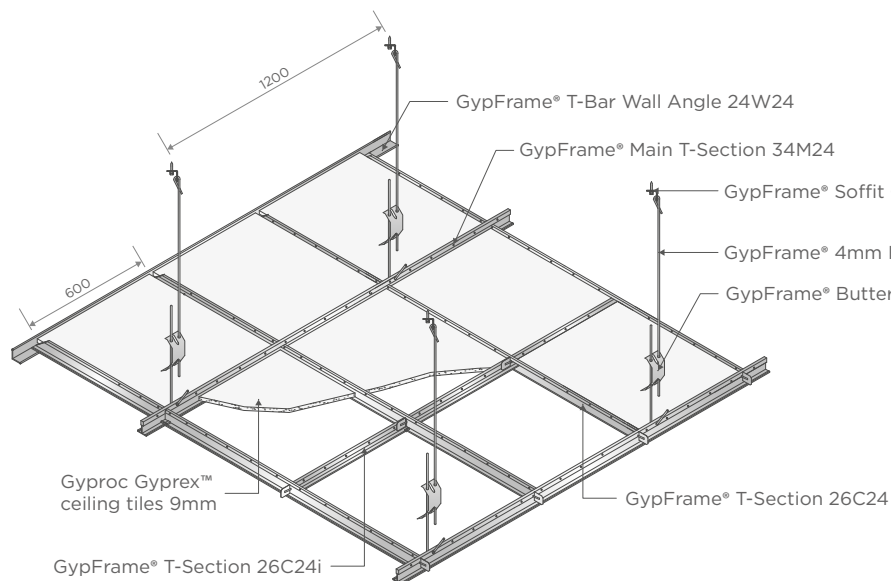

Gyproc® Grid Ceiling 600mm x 600mm Gyprex™

Parameters	Values
Overall System Weight	8.50kg/m ²
Maximum Ceiling Span (mm)	Unlimited
Fire Performance (Board)	Class O

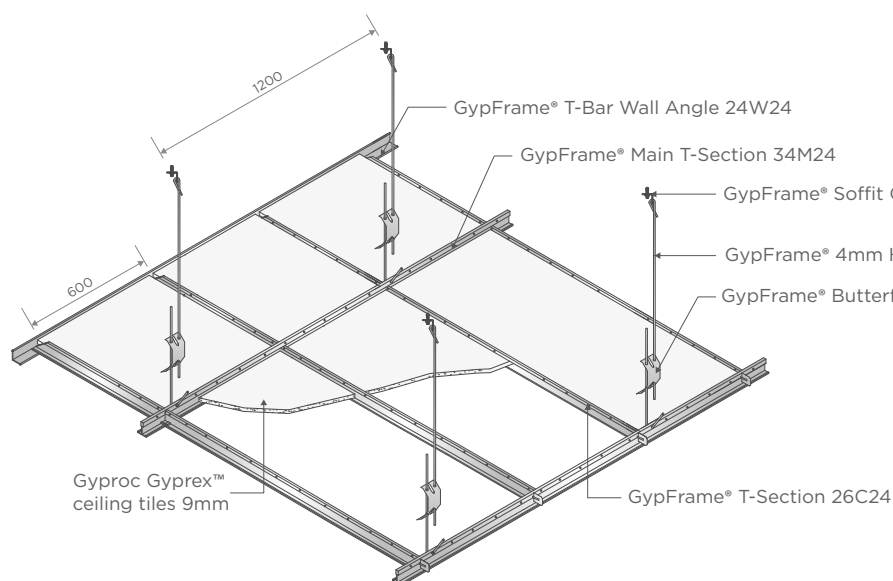

Gyproc® Grid Ceiling 600mm x 1200mm Gyprex™

Parameters	Values
Overall System Weight	8.50kg/m ²
Maximum Ceiling Span (mm)	Unlimited
Fire Performance (Board)	Class O



Saint-Gobain Malaysia Sdn. Bhd. (636775-T)
No.1, Jalan Sultan Mohamad 4
Kawasan Perindustrian Bandar
Sultan Suleiman, Port Klang,
42000 Selangor, Malaysia.
Tel: +603 3169 5588
Fax: +603 3169 5688
Email: solutions.my@saint-gobain.com
www.gyproc.my

SINGAPORE OFFICE
Saint-Gobain (Singapore) Pte.Ltd.
2 Venture Drive, #09-10/11/12/13/14
Vision Exchange
Singapore 608526
Tel: +65 6330 8288
www.gyproc.sg



SCAN ME

